

**METALLIZED POLYPROPYLENE CAPACITOR
MULTIPURPOSE APPLICATIONS**

Typical applications: temperature compensation circuits, timing, oscillator circuits, power factor correction and coupling capacitor in SMPS applications.


PRODUCT CODE: **A70**

D max	5	>5 ≤ 7	>7 < 16	≥ 16
Ød ±0.05	0.5	0.6	0.8	1

All dimensions are in mm.

PRODUCT CODE SYSTEM

The part number, comprising 14 digits, is formed as follows:



- Digit 1 to 3 Series code.
- Digit 4 d.c. rated voltage:
G = 160V I = 250V M = 400V P = 630V
- Digit 5 Length (mm):
F=11; H=14; K=20.5; Q=28; T=33
- Digit 6 to 9 Digits 7 - 8 - 9 indicate the first three digits of Capacitance value and the 6th digit indicates the number of zeros that must be added to obtain the Rated Capacitance in pF.
- Digit 10 to 11 Mechanical version and/or packaging (table 1)
- Digit 12 Identifies the dimensions and electrical characteristics.
- Digit 13 Internal use
- Digit 14 Capacitance tolerance:
J=5%; K=10%; M=20%.

GENERAL TECHNICAL DATA

- Dielectric:** polypropylene film.
- Plates:** aluminium layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire.
- Protection:** polyester tape wrapping and thermosetting resin end fill.
- Marking:** Manufacturer's logo, series (1.70), dielectric code (MKP), capacitance, tolerance, D.C. rated voltage.
- Climatic category:** 55/105/56 IEC 60068-1
- Operating temperature range:** -55 to +105°C
- Related documents:** IEC 60384-16

Winding scheme

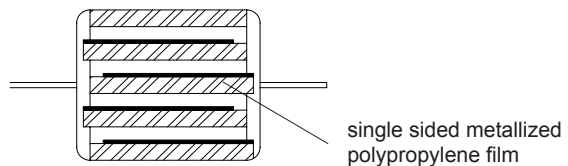


Table 1 (for more detailed information, please refer to page 14).

Standard packaging style	Ordering code (Digit 10 to 11)
Reel Ø 355 mm	26
Loose	AA

**METALLIZED POLYPROPYLENE CAPACITOR
MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: **A70**

Rated Cap.	160Vdc/90Vac		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D max	L max			
0.022 μF	5.0	11.0	5	1.60 E3	A70GF 2220--0--
0.033 μF	5.0	11.0	5	1.60 E3	A70GF 2330--0--
0.047 μF	5.0	11.0	5	1.60 E3	A70GF 2470--0--
0.068 μF	5.5	14.0	5	1.60 E3	A70GH 2680--0--
0.10 μF	5.5	14.0	5	1.60 E3	A70GH 3100--0--
0.15 μF	6.5	14.0	5	1.60 E3	A70GH 3150--0--
0.22 μF	7.5	14.0	5	1.60 E3	A70GH 3220--0--
0.33 μF	7.0	20.5	3	0.96 E3	A70GK 3330--0--
0.47 μF	8.0	20.5	3	0.96 E3	A70GK 3470--0--
0.68 μF	8.0	28.0	2	0.64 E3	A70GQ 3680--0--
1.0 μF	9.5	28.0	2	0.64 E3	A70GQ 4100--0--
1.5 μF	11.0	28.0	2	0.64 E3	A70GQ 4150--0--
2.2 μF	12.0	33.0	1	0.32 E3	A70GT 4220--0--
3.3 μF	14.5	33.0	1	0.32 E3	A70GT 4330--0--
4.7 μF	17.0	33.0	1	0.32 E3	A70GT 4470--0--

Rated Cap.	400Vdc/220Vac*		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D max	L max			
6800 pF	5.0	11.0	25.0	20.0 E3	A70MF 1680--0--
0.010 μF	5.5	14.0	13.5	11.0 E3	A70MH 2100--0--
0.015 μF	6.0	14.0	13.5	11.0 E3	A70MH 2150--0--
0.022 μF	6.0	14.0	13.5	11.0 E3	A70MH 2220--0--
0.033 μF	6.5	14.0	13.5	11.0 E3	A70MH 2330--0--
0.047 μF	8.0	14.0	13.5	11.0 E3	A70MH 2470--0--
0.068 μF	7.0	20.5	10.0	8.0 E3	A70MK 2680--0--
0.10 μF	8.0	20.5	10.0	8.0 E3	A70MK 3100--0--
0.15 μF	8.0	28.0	6.5	5.2 E3	A70MQ 3150--0--
0.22 μF	9.5	28.0	6.5	5.2 E3	A70MQ 3220--0--
0.33 μF	11.0	28.0	6.5	5.2 E3	A70MQ 3330--0--
0.47 μF	13.0	28.0	6.5	5.2 E3	A70MQ 3470--0--
0.68 μF	13.5	33.0	4.0	3.2 E3	A70MT 3680--0--
1.0 μF	16.5	33.0	4.0	3.2 E3	A70MT 4100--0--
1.5 μF	20.0	33.0	4.0	3.2 E3	A70MT 4150--0--

Rated Cap.	250Vdc/200Vac		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D max	L max			
0.010 μF	5.0	11.0	11.0	5.5 E3	A70IF 2100--0--
0.015 μF	5.0	11.0	11.0	5.5 E3	A70IF 2150--0--
0.022 μF	5.5	14.0	10.0	5.0 E3	A70IH 2220--0--
0.033 μF	5.5	14.0	10.0	5.0 E3	A70IH 2330--0--
0.047 μF	6.0	14.0	10.0	5.0 E3	A70IH 2470--0--
0.068 μF	7.0	14.0	10.0	5.0 E3	A70IH 2680--0--
0.10 μF	8.5	14.0	10.0	5.0 E3	A70IH 3100--0--
0.15 μF	7.5	20.5	7.0	3.5 E3	A70IK 3150--0--
0.22 μF	9.0	20.5	7.0	3.5 E3	A70IK 3220--0--
0.33 μF	8.5	28.0	4.0	2.0 E3	A70IQ 3330--0--
0.47 μF	10.0	28.0	4.0	2.0 E3	A70IQ 3470--0--
0.68 μF	11.5	28.0	4.0	2.0 E3	A70IQ 3680--0--
1.0 μF	12.5	33.0	2.5	1.3 E3	A70IT 4100--0--
1.5 μF	15.0	33.0	2.5	1.3 E3	A70IT 4150--0--
2.2 μF	18.0	33.0	2.5	1.3 E3	A70IT 4220--0--
3.3 μF	21.5	33.0	2.5	1.3 E3	A70IT 4330--0--

Rated Cap.	630Vdc/250Vac*		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D max	L max			
1000 pF	5.0	11.0	30	38.0 E3	A70PF 1100--0--
1500 pF	5.0	11.0	30	38.0 E3	A70PF 1150--0--
2200 pF	5.0	11.0	30	38.0 E3	A70PF 1220--0--
3300 pF	5.0	11.0	30	38.0 E3	A70PF 1330--0--
4700 pF	5.0	11.0	30	38.0 E3	A70PF 1470--0--
6800 pF	5.5	14.0	20	25.0 E3	A70PH 1680--0--
0.010 μF	6.0	14.0	20	25.0 E3	A70PH 2100--0--
0.015 μF	7.0	14.0	20	25.0 E3	A70PH 2150--0--
0.022 μF	8.5	14.0	20	25.0 E3	A70PH 2220--0--
0.033 μF	7.5	20.5	15	19.0 E3	A70PK 2330--0--
0.047 μF	8.5	20.5	15	19.0 E3	A70PK 2470--0--
0.068 μF	8.5	28.0	10	13.0 E3	A70PQ 2680--0--
0.10 μF	10.0	28.0	10	13.0 E3	A70PQ 3100--0--
0.15 μF	11.5	28.0	10	13.0 E3	A70PQ 3150--0--
0.22 μF	12.5	33.0	6	7.6 E3	A70PT 3220--0--
0.33 μF	15.0	33.0	6	7.6 E3	A70PT 3330--0--
0.47 μF	17.5	33.0	6	7.6 E3	A70PT 3470--0--
0.68 μF	21.0	33.0	6	7.6 E3	A70PT 3680--0--

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

All dimensions are in mm.

Note 1: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V. The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table. The dv/dt test is carried out at 2 times the above values.

Note 2: Special version for line applications (rated voltage 250 Vac) available upon request.

* Not suitable for cross-the-line applications. Please refer to Interference Suppression Capacitors (page 145).

**METALLIZED POLYPROPYLENE CAPACITOR
MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: **A70**

ELECTRICAL CHARACTERISTICS

Rated voltage (V_R): 160 Vdc - 250Vdc
400 Vdc - 630 Vdc

Rated temperature (T_R): +85°C

Temperature derated voltage:

for temperatures between +85°C and +105°C a decreasing factor of 1.25% per degree °C on the rated voltage V_R (d.c. and a.c.) has to be applied.

Capacitance range: 1000pF to 4.7µF

Capacitance values:

E6 series (IEC 60063 Norm).

Capacitance tolerances (measured at 1 kHz):

±5% (J); ±10% (K); ±20% (M).

Total self-inductance (L):

max 1 nH per 1 mm lead and capacitor length.

Dissipation factor (DF):

$\text{tg}\delta \times 10^{-4}$ at +25°C ±5°C

kHz	C<0.1 µF	0.1 µF to 1 µF	>1 µF
1	≤ 6	≤ 6	≤ 6
10	≤10	≤20	
100	≤30		

Insulation resistance:

Test conditions

Temperature: +25°C ± 5°C

Voltage charge time: 1 min

Voltage charge: 100Vdc

Performance

≥1x10⁵ MΩ for C ≤ 0.33 µF (5x10⁵ MΩ)*
≥30000 s for C > 0.33 µF (150000 s)*

*Typical value

Test voltage between terminations:

1.6x V_R applied for 2 s at +25°C ±5°C.

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions

Temperature: +40°C±2°C

Relative humidity (RH): 93% ±2%

Test duration: 56 days

Performance

Capacitance change $|\Delta C/C|$: ≤2%

DF change ($\Delta \text{tg}\delta$): ≤10x10⁻⁴ at 1kHz

Insulation resistance: ≥50% of initial limit.

Endurance:

Test conditions

Temperature: +85°C±2°C

Test duration: 2000 h

Voltage applied: 1.25x V_R

Performance

Capacitance change $|\Delta C/C|$: ≤3%

DF change ($\Delta \text{tg}\delta$): ≤10x10⁻⁴ at 10kHz for C≤1µF

≤10x10⁻⁴ at 1kHz for C>1µF

Insulation resistance: ≥50% of initial limit.

Resistance to soldering heat:

Test conditions

Solder bath temperature: +260°C±5°C

Dipping time (with heat screen): 10 s ±1 s

Performance

Capacitance change $|\Delta C/C|$: ≤1%

DF change ($\Delta \text{tg}\delta$): ≤10x10⁻⁴ at 10kHz for C≤1µF

≤10x10⁻⁴ at 1kHz for C>1µF

Insulation resistance: ≥ initial limit.





Long term stability (after two years):

Storage: standard environmental conditions (see page 12).





Performance

Capacitance change $|\Delta C/C|$: ≤0.5%

MAX. VOLTAGE (Vr.m.s.) VERSUS FREQUENCY (sinusoidal wave-form / Th ≤ 40°C)

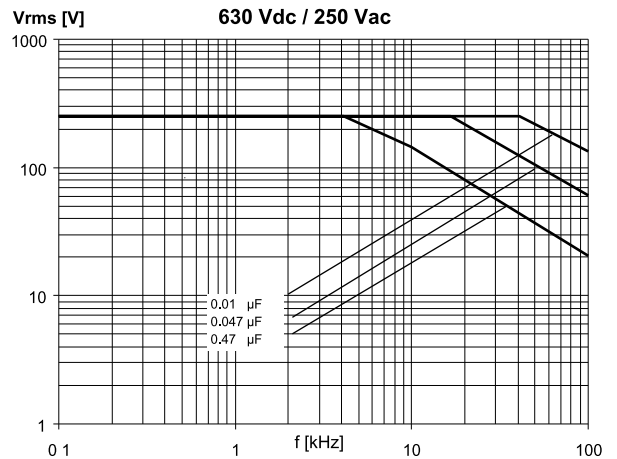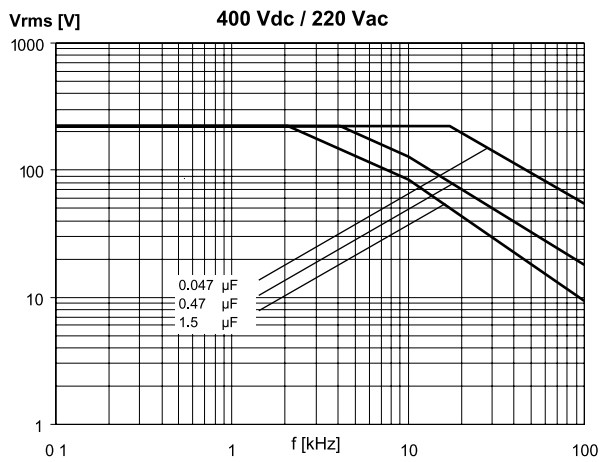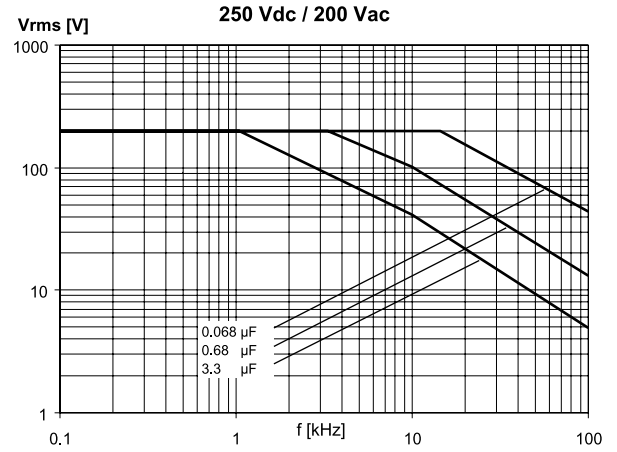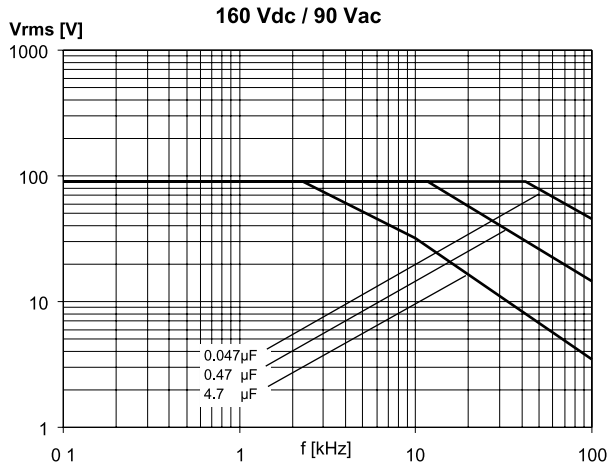

MAX. CURRENT (I_{r.m.s.}) VERSUS FREQUENCY (sinusoidal wave-form / Th ≤ 40°C)

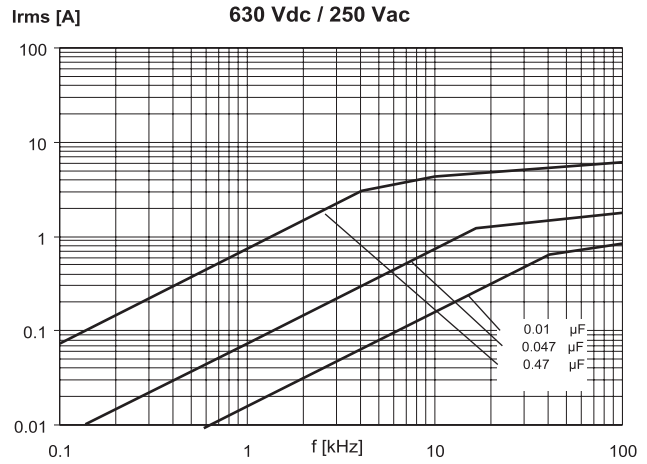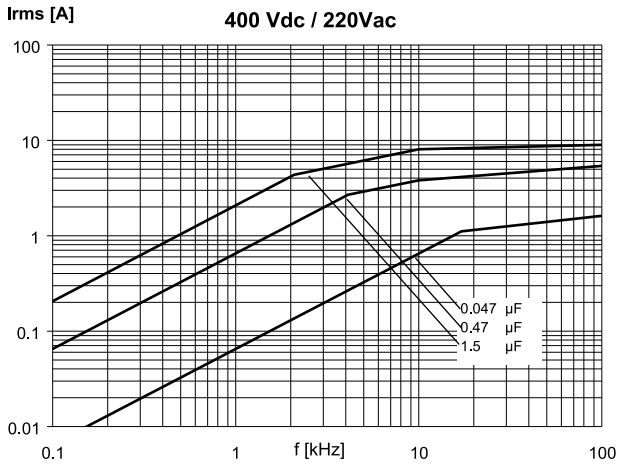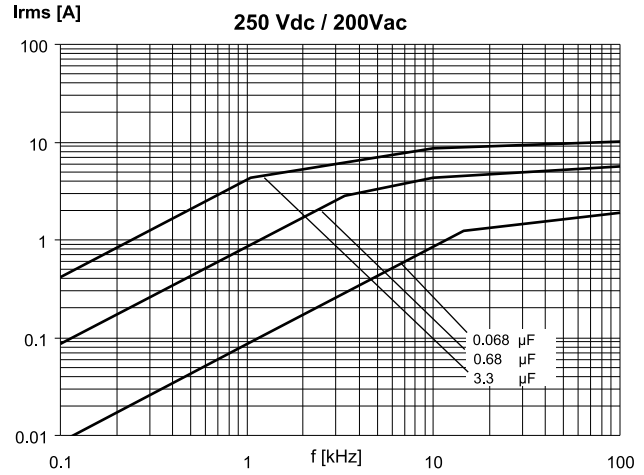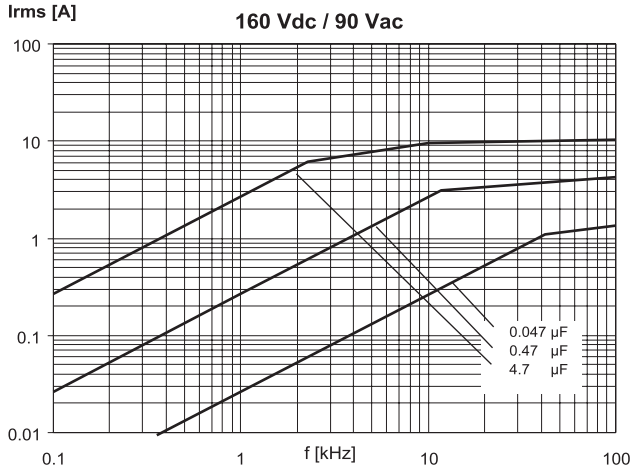

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.